

Cavity Closer



A comprehensive range of Cavity Closers and an overhead vent that provides an accurate template during construction, insulates the cavity and ensures efficient window installation.

Features


Frame Offering


- ◀ Suitable for cavity widths of 75mm, 100mm, 125mm and 150mm
- ◀ Flat option on all widths
- ◀ 75mm to 125mm options for check reveals
- ◀ A range of widths available with central upstead, see wall chart
- ◀ One piece overhead vent section with deep inner reveal to suit all head construction details and recessed outer grill.

Finishes

- ◀ 100% recycled material, no finish required.

The Duraframe Cavity Closer system benefits from achieving BBA certification (cert ref. 04/4092). Comprehensive test data can be found in the certificate obtainable from either Duraflex or via an online search www.bbacerts.co.uk

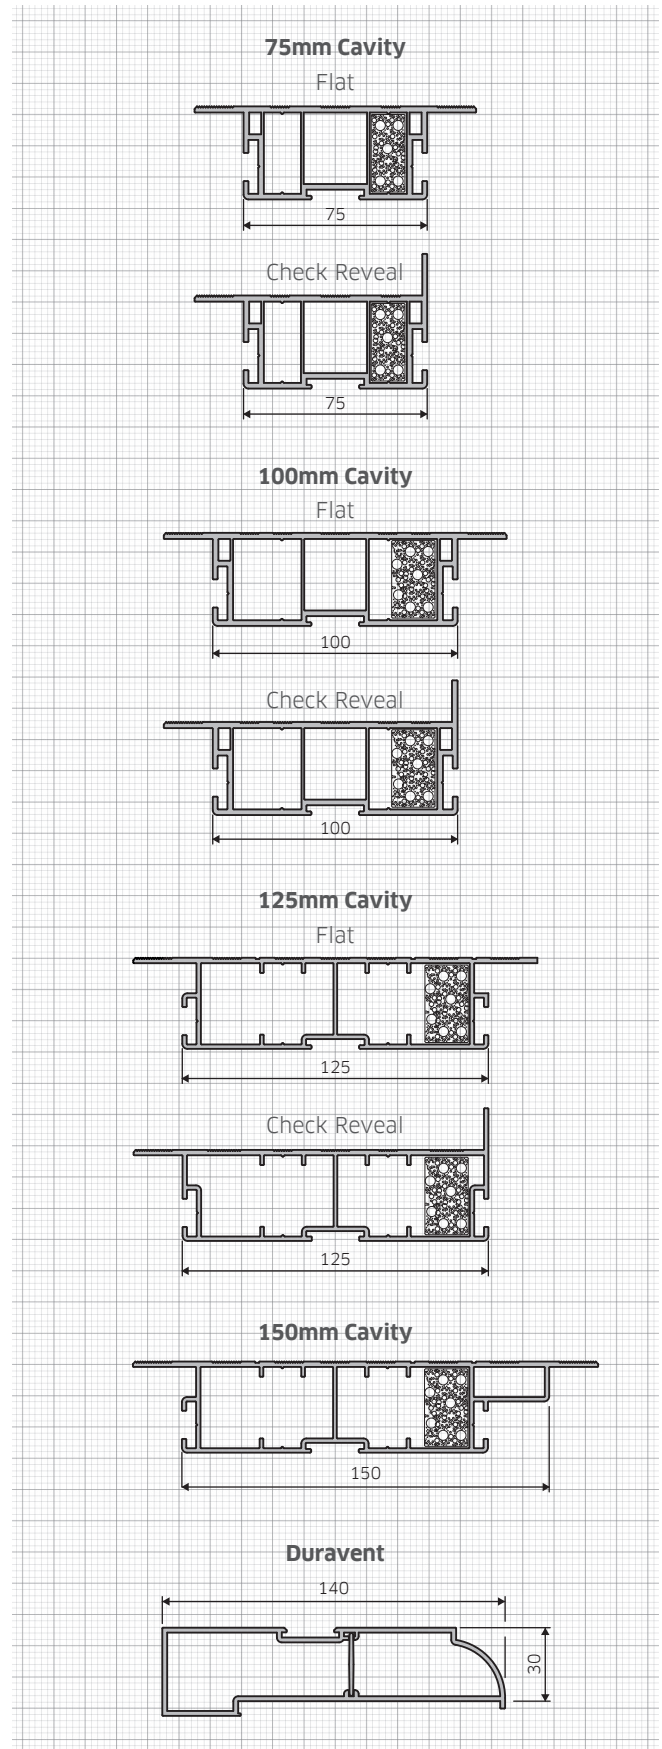

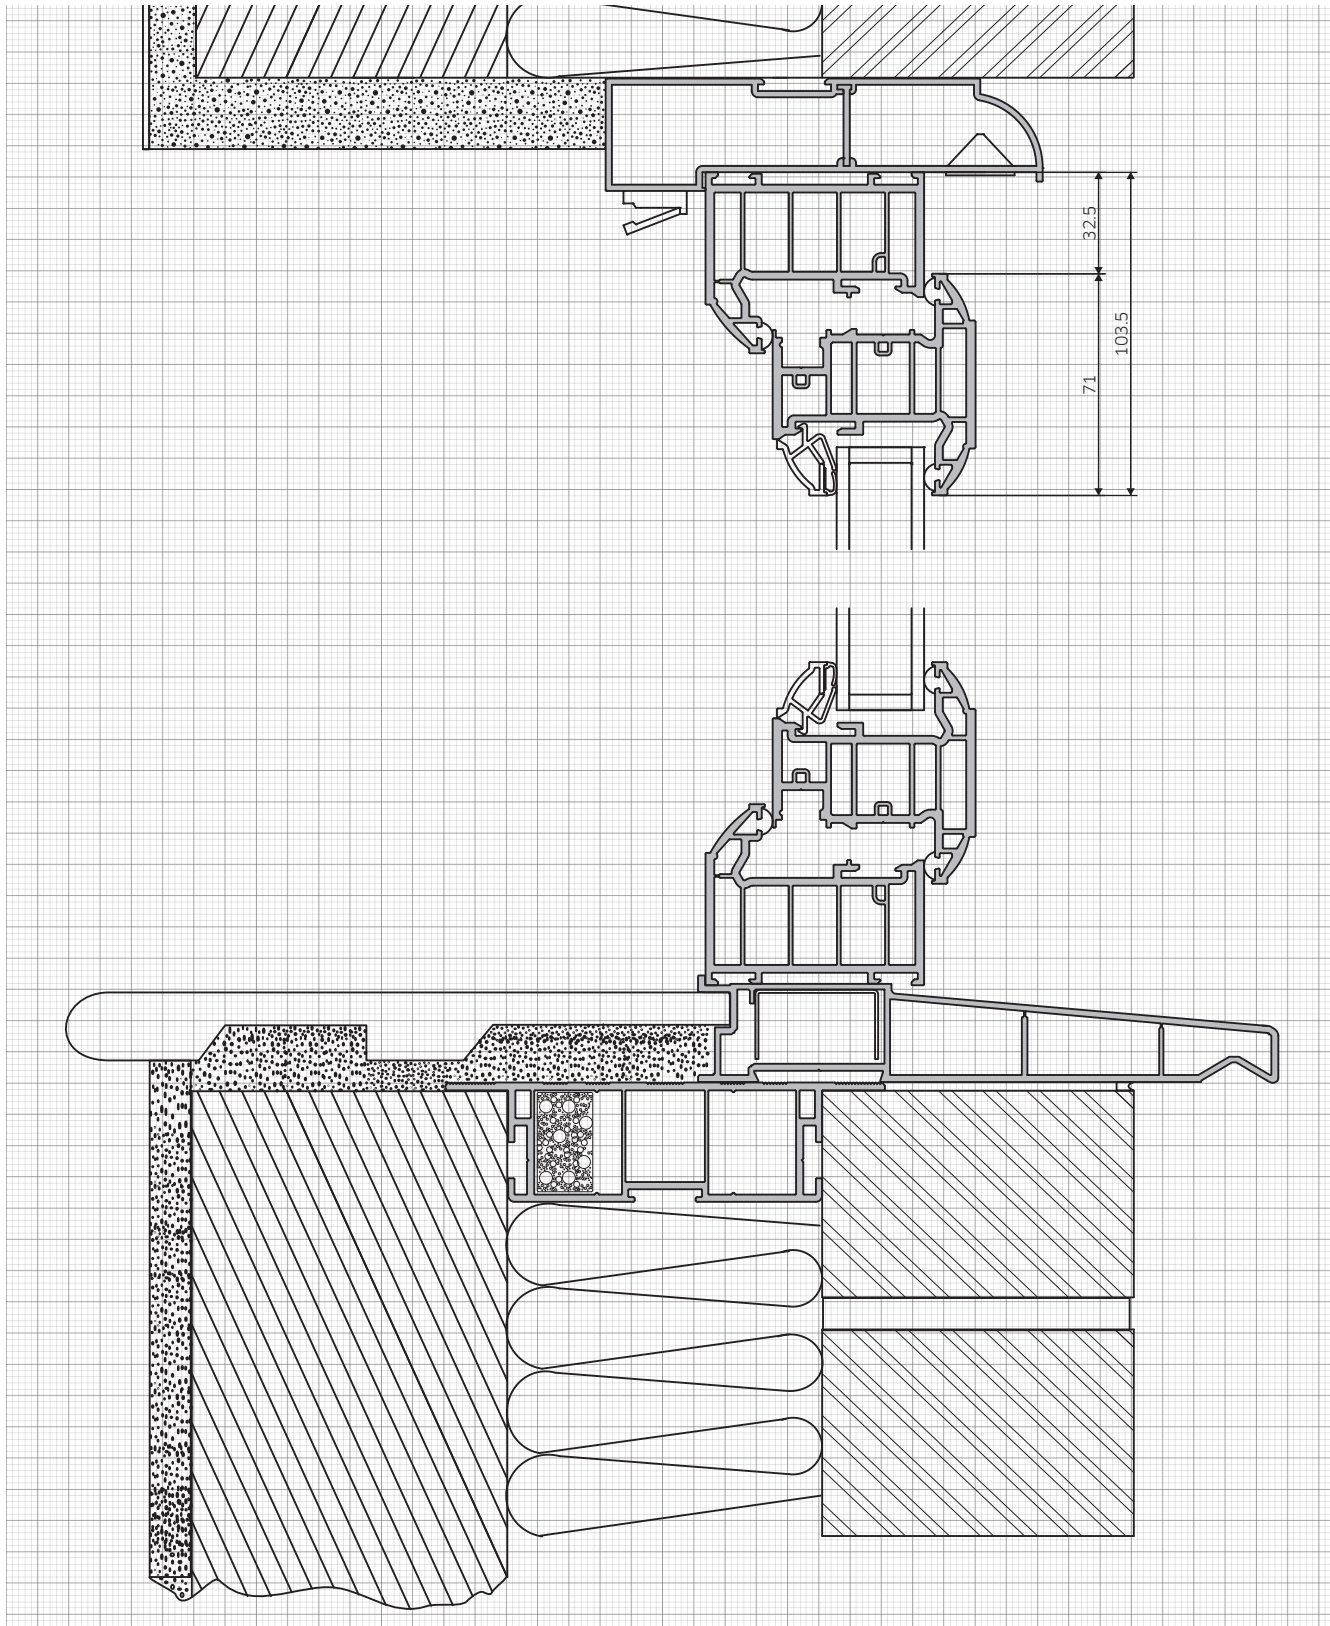

Following recent changes in legislation to improve the thermal insulation values of all properties the Duraflex Cavity Closer is being re-assessed to the new IP8/08 regulation. This will require insulation to be inserted in all cases. Please refer to the updated manual and bulletins to ensure compliance with regulations, contact our Technical Department for more information.